




An Axis company

2N® Access Commander

Easy to use by non-professionals

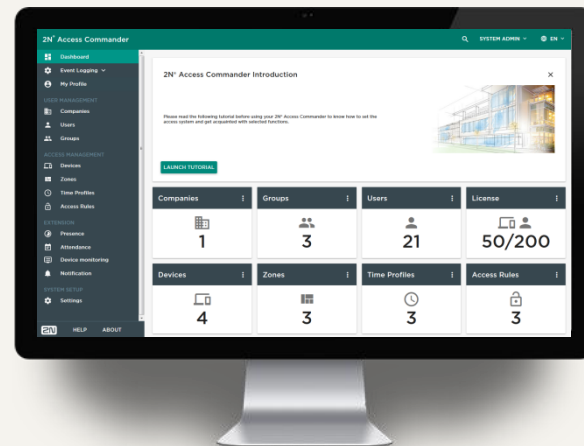

ACCESS CONTROL

www.2n.cz

VERTICALS



Office



Residential




Industry




Education



Transportation



Government

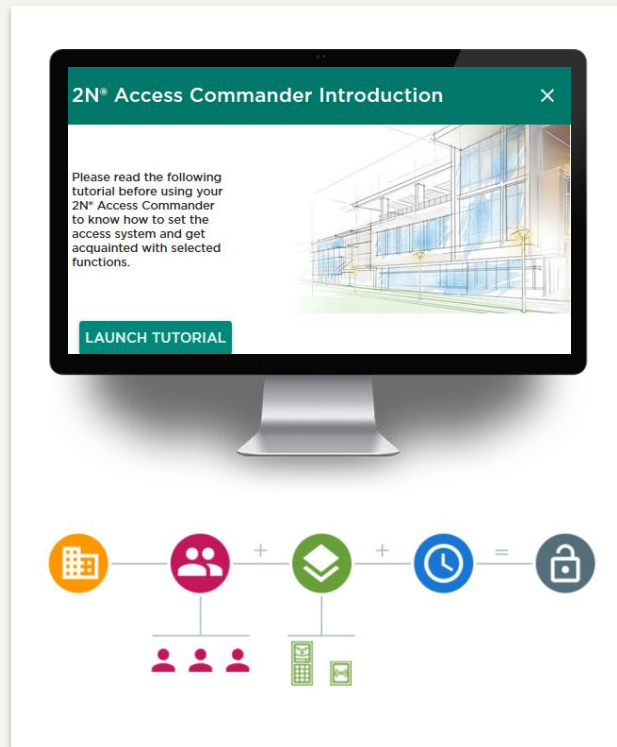


SW for Access Control configuration

- • **professional access control system**
- all basic functionalities typical for AC systems covered
- advanced features
 - T&A tracking, Presence, Active Directory sync, device monitoring, notifications, etc.
- graphical tutorial for creation of access rules (**WHO** + **WHERE** + **WHEN**)

Tool for bulk management

- • bulk configuration in larger installations
- manage all 2N devices from one centralized place

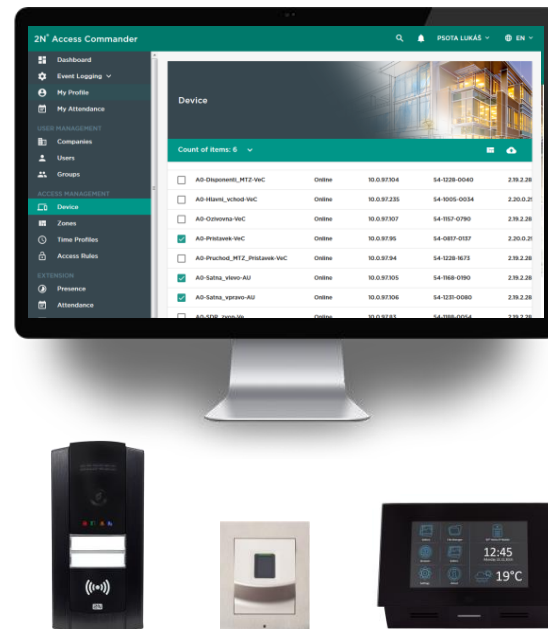



VirtualBox


Microsoft
Hyper-V

Up and running in 10 minutes

- • no installation experience needed
- configuration is intuitive and straight forward
- graphical tutorial
- installation to different platforms:
 - Oracle VM Virtual Box
 - VMware
 - Microsoft Hyper-V


Open for the integration

- • create one truly integrated system
- integration with VMS, T&A, alarm and other 3rd party systems
- via REST API web interface or special plugin

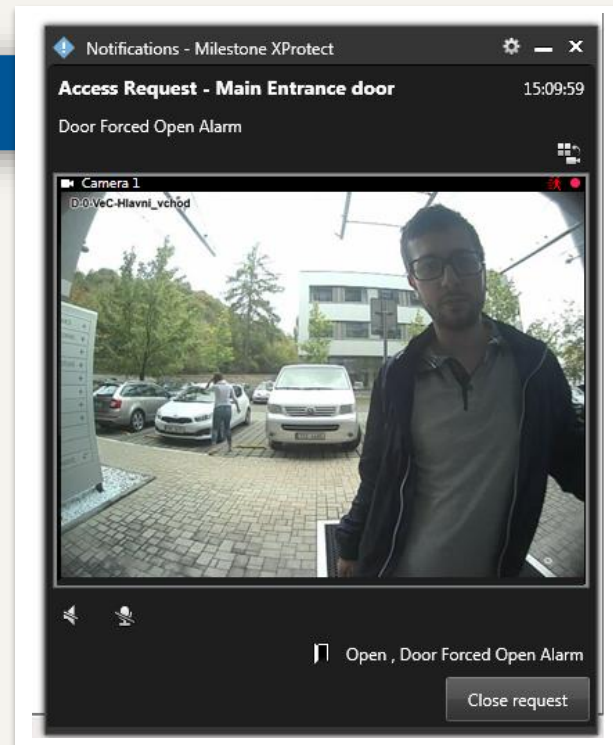


Cam Logs

- possibility to check all access logs related to the date / time of incident
- pre-set selected events
- 5 sec before event, 3 sec after
- immediate visual verification

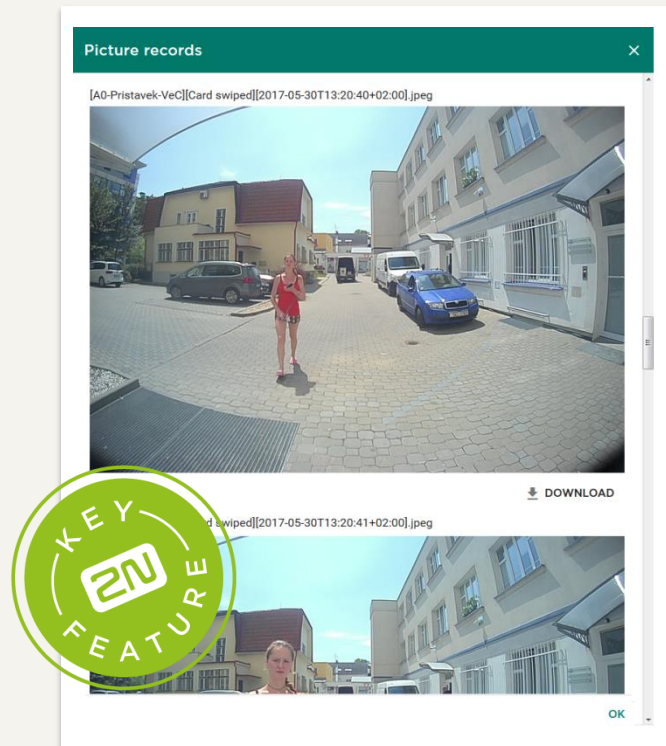

Visitor management

- • system can be comfortably used by a receptionist
- quick enrollment of visitors to the system (all important information included):
 - visitor's name
 - reason of the visit
 - time validation of the card
 - group assignment

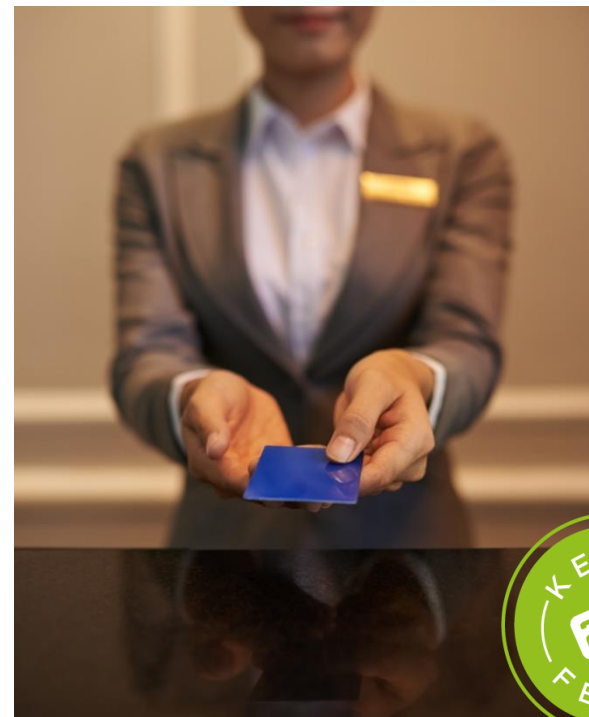


Multiple sites control

- • controlling multiple sites from one location
- locations must be interconnected via VPN
- administrator oversees the system through LAN



CONNECTION TOPOLOGY

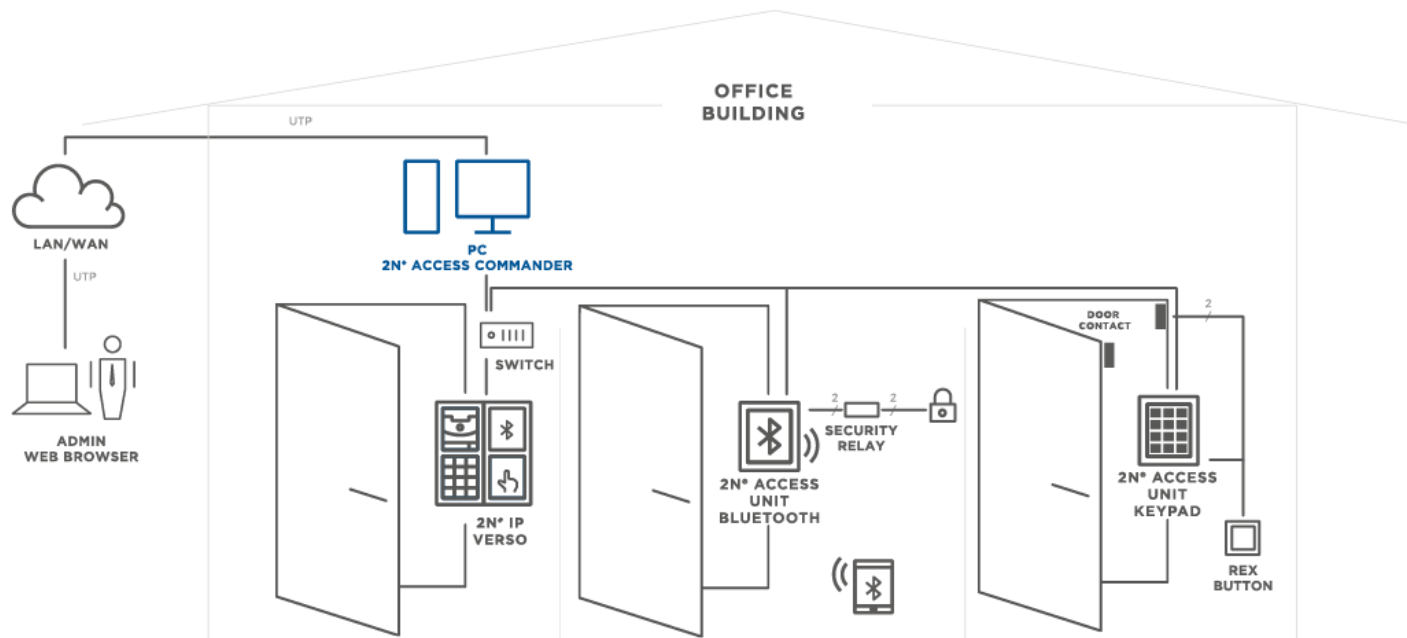

INTEGRATION WITH 3RD PARTY PRODUCTS



ACCESS CONTROL

**ADVENT
ONFIT**
(T&A systems)



VIDEO MANAGEMENT SYSTEMS

Milestone

COMPATIBLE PRODUCTS



2N Access Unit
9160xx



2N IP intercoms
913xxxx, 915xxxx



2N® Indoor Touch
913783xx

LICENSES




License for +5 devices

91379040



License for +25 users

913790401

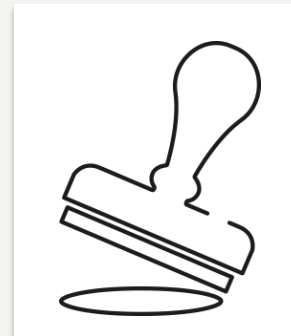

LDAP license

91379042

Technical Specification

- Distributed as a complete package in the .OVA format
- Intended for importing into the Oracle VM VirtualBox, VMware (version 5) or Hyper-V virtual systems.

Minimum HW requirements for the PC/server

Specification below is for 50 connected device:

- Operating system: any 64-bit system (Windows, Linux, OS X, Solaris)
- CPU: 2GHz; 2 core (x86 – 64)
- RAM: 4GB

